



Dimensions

All dimensions are approximate.

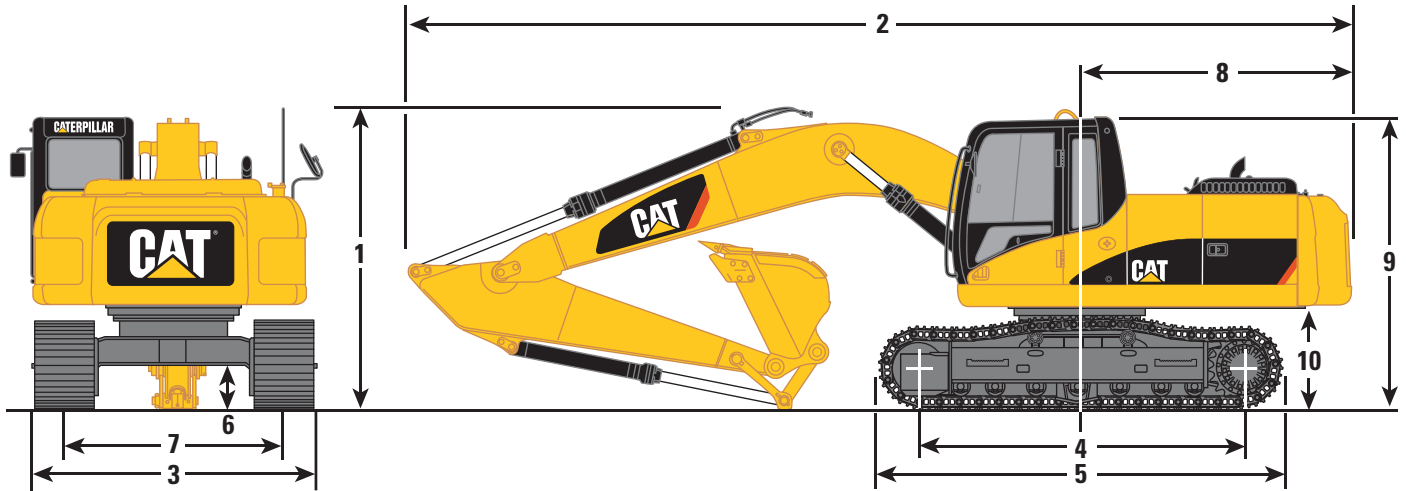

	mm		mm		mm
1 Shipping height (with bucket)		3 Transport width		6 Ground clearance	450
2500 mm stick	3050	600 mm shoes	2980	7 Track gauge	2380
2920 mm stick	3120	800 mm shoes	3180	8 Tail swing radius	2750
2 Shipping length		4 Length to centers of rollers	3650	9 Cab height	2950
2500 mm stick	9460	5 Track length	4455	10 Counterweight clearance	1020
2920 mm stick	9460				

Working Ranges – Reach Boom (5680 mm)

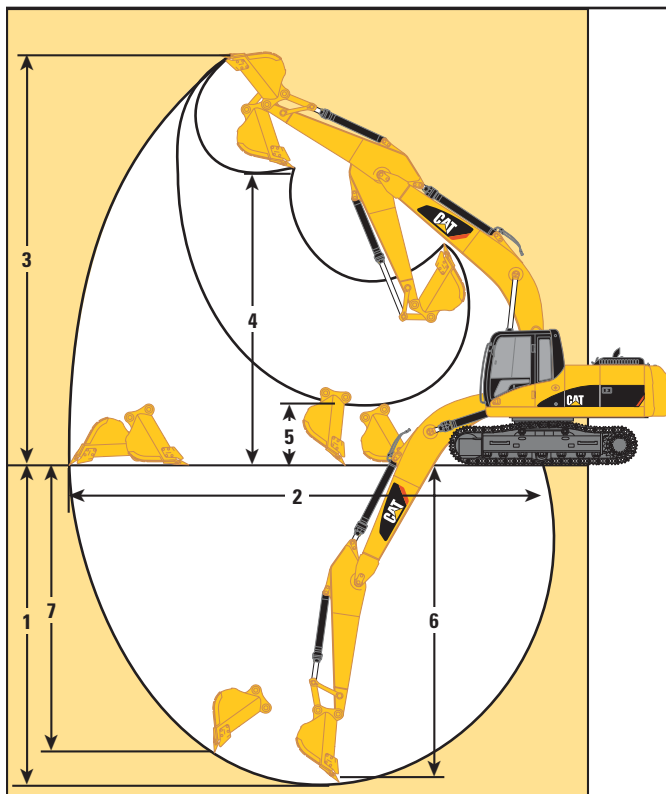

Stick Type		R2.5B1	R2.9B1
Stick Length	mm	2500	2920
1 Maximum Digging Depth	mm	6270	6690
2 Maximum Reach at Ground Level	mm	9430	9830
3 Maximum Cutting Height	mm	9320	9520
4 Maximum Loading Height	mm	6320	6520
5 Minimum Loading Height	mm	2620	2200
6 Maximum Digging Depth 2.5 m Level Bottom	mm	6080	6520
7 Maximum Vertical Wall Digging Depth	mm	5760	6180
Bucket Tip Radius	mm	1554	1554
Bucket Forces (ISO 6015)	kN	141	141
Stick Forces (ISO 6015)	kN	118	106